




## ASK 63.6 Plug-in current transformer

Plug-in current transformer for primary nominal currents from 200 A up to 2000 A, secondary nominal current 5 A or 1 A (optional 2 A), accuracy class 0.5 and 1 (optional in class 0.2 and 0.5s).



### Dimensions:

Bus bar 1: 60 x 30 mm  
Round conductor: 30 mm  
Width: 88 mm  
Height: 129 mm  
Depth: 78 mm

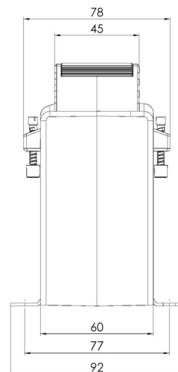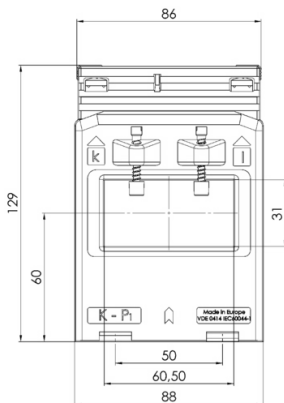

### Technical details:

Therm. nominal continuous current  $I_{cth}$ :  $1,0 \times I_N$   
Therm. nominal short-time current  $I_{th}$ :  $60 \times I_N$ , 1 sec.

Max. operating voltage  $U_m$ : 0.72 kV

Isolation test voltage: 3 kV,  $U_{eff}$ , 50 Hz, 1 min.

Nominal rated frequency: 50 Hz

Isolation class: E

### Further information:

Over-current limiting factor: See rating plate

Working temperature range:  $-5^\circ\text{C} < T < +40^\circ\text{C}$

Storage temperature range:  $-25^\circ\text{C} < T < +40^\circ\text{C}$

Unbreakable plastic housing made of black polycarbonate:

Flame resistant, ultrasonically welded

Nickel-plated secondary terminals with plus-minus

nickel-plated screws:

M5x10mm

Secondary caps: integrated

Package quantity: 1 pcs.

Custom tariff number: 85043129

### GMW Contact:

[www.g-mw.de](http://www.g-mw.de)  
[info@g-mw.de](mailto:info@g-mw.de)

Phone: +49/9103 7129-0  
Fax: +49/9103 7129-205/207