




ASK 83.4 Plug-in current transformer

Plug-in current transformers for primary nominal currents of 300 A up to 2500 A with a secondary nominal current of 5 A or 1 A (optional 2 A) accuracy classes 0.5 and 1. When ordering state selectable secondary terminal positions, making a flexible fitment possible.



Dimensions:

Bus bar 1: 84 x 34 mm
Round conductor: 34 mm
Width: 96 mm
Height: 117 mm
Depth: 68 mm

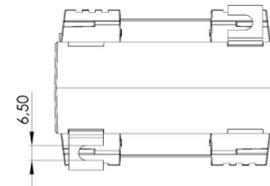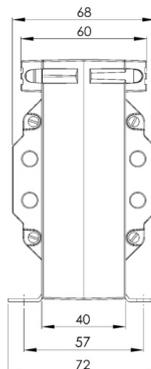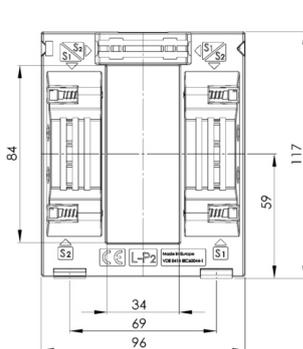

Technical details:

Therm. nominal continuous current I_{cth} : 1,0 x I_N
Therm. nominal short-time current I_{th} : 60 x I_N , 1 sec.

Max. operating voltage U_m : 0.72 kV

Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.

Nominal rated frequency: 50 Hz

Isolation class: E

Further information:

Over-current limiting factor: See rating plate

Working temperature range: $-5^{\circ}\text{C} < T < +40^{\circ}\text{C}$

Storage temperature range: $-25^{\circ}\text{C} < T < +40^{\circ}\text{C}$

Unbreakable plastic housing made of black polycarbonate:

Flame resistant, ultrasonically welded

Nickel-plated secondary terminals with plus-minus nickel-plated screws:

M5x10mm

Package quantity: 1 pcs.

Custom tariff number: 85043129

GMW Contact:

www.g-mw.de
info@g-mw.de

Phone: +49/9103 7129-0
Fax: +49/9103 7129-205/207