






SASK 61.10

Protection plug-in current transformer

Bus bar 1 60 x 10 mm
 Bus bar 2 50 x 30 mm
 Transformer width 150 mm
 Height 175,5 mm
 Depth 114 mm






Primary current [A]	Burden [VA]	Secondary current [A] / Class			
		5 A Cl. 5P5 Art.-no.	5 A Cl. 10P5 Art.-no.	5 A Cl. 5P10 Art.-no.	5 A Cl. 10P10 Art.-no.
100	2,5	100S50-1306D	100S50-1307D	100S50-1308D	100S50-1309D
	5	100S50-1306F	100S50-1307F		
150	5	100S50-1606F	100S50-1607F	100S50-1608F	100S50-1609F
	7,5	100S50-1606G	100S50-1607G		
200	10	100S50-1606H	100S50-1607H		
	5	100S50-1706F	100S50-1707F	100S50-1708F	100S50-1709F
	7,5	100S50-1706G	100S50-1707G		
	10	100S50-1706H	100S50-1707H		
250	15	100S50-1706J	100S50-1707J		
	5	100S50-1806F	100S50-1807F	100S50-1808F	100S50-1809F
	7,5	100S50-1806G	100S50-1807G		100S50-1809G
	10	100S50-1806H	100S50-1807H	100S50-1908H	100S50-1809H
300	15	100S50-1806J	100S50-1807J		
	5	100S50-1906F	100S50-1907F	100S50-1908F	100S50-1909F
	7,5	100S50-1906G	100S50-1907G	100S50-1908G	100S50-1909G
	10	100S50-1906H	100S50-1907H		100S50-1909H
400	15	100S50-1906J	100S50-1907J		
	5	100S50-2006F	100S50-2007F	100S50-2008F	100S50-2009F
	7,5	100S50-2006G	100S50-2007G	100S50-2008G	100S50-2009G
	10	100S50-2006H	100S50-2007H	100S50-2008H	100S50-2009H
500	15	100S50-2006J	100S50-2007J		100S50-2009J
	5	100S50-2106F	100S50-2107F	100S50-2108F	100S50-2109F
	7,5	100S50-2106G	100S50-2107G	100S50-2108G	100S50-2109G
	10	100S50-2106H	100S50-2107H	100S50-2108H	100S50-2109H
600	15	100S50-2106J	100S50-2107J	100S50-2108J	100S50-2109J
	5	100S50-2206F	100S50-2207F	100S50-2208F	100S50-2209F
	7,5	100S50-2206G	100S50-2207G	100S50-2208G	100S50-2209G
	10	100S50-2206H	100S50-2207H	100S50-2208H	100S50-2209H
750	15	100S50-2206J	100S50-2207J	100S50-2208J	100S50-2209J
	5	100S50-2306F	100S50-2307F	100S50-2308F	100S50-2309F
	7,5	100S50-2306G	100S50-2307G	100S50-2308G	100S50-2309G
	10	100S50-2306H	100S50-2307H	100S50-2308H	100S50-2309H
1000	15	100S50-2306J	100S50-2307J	100S50-2308J	100S50-2309J
	5	100S50-2506F	100S50-2507F	100S50-2508F	100S50-2509F
	7,5	100S50-2506G	100S50-2507G	100S50-2508G	100S50-2509G
	10	100S50-2506H	100S50-2507H	100S50-2508H	100S50-2509H
1200	15	100S50-2506J	100S50-2507J	100S50-2508J	100S50-2509J
	5	100S50-2606F	100S50-2607F	100S50-2608F	100S50-2609F
	7,5	100S50-2606G	100S50-2607G	100S50-2608G	100S50-2609G
	10	100S50-2606H	100S50-2607H	100S50-2608H	100S50-2609H
1250	15	100S50-2606J	100S50-2607J	100S50-2608J	100S50-2609J
	5	100S50-2706F	100S50-2707F	100S50-2708F	100S50-2709F
	7,5	100S50-2706G	100S50-2707G	100S50-2708G	100S50-2709G
	10	100S50-2706H	100S50-2707H	100S50-2708H	100S50-2709H
1500	15	100S50-2706J	100S50-2707J	100S50-2708J	100S50-2709J
	5	100S50-2806F	100S50-2807F	100S50-2808F	100S50-2809F
	7,5	100S50-2806G	100S50-2807G	100S50-2808G	100S50-2809G
	10	100S50-2806H	100S50-2807H	100S50-2808H	100S50-2809H
	15	100S50-2806J	100S50-2807J	100S50-2808J	100S50-2809J

SASK 61.10

Protection plug-in current transformer



Bus bar 1 60 x 10 mm
 Bus bar 2 50 x 30 mm
 Transformer width 150 mm
 Height 175,5 mm
 Depth 114 mm



Primary current [A]	Burden [VA]	Secondary current [A] / Class			
		5 A Cl. 5P15 Art.-no.	5 A Cl. 10P15 Art.-no.	5 A Cl. 5P20 Art.-no.	5 A Cl. 10P20 Art.-no.
150	2,5	100S50-160AD	100S50-160BD		
200	2,5	100S50-170AD	100S50-170BD	100S50-170CD	100S50-170DD
250	2,5	100S50-180AD	100S50-180BD	100S50-180CD	100S50-180DD
	5	100S50-180AF	100S50-180BF		
300	2,5	100S50-190AD	100S50-190BD	100S50-190CD	100S50-190DD
	5	100S50-190AF	100S50-190BF		100S50-190DF
400	5	100S50-200AF	100S50-200BF	100S50-200CF	100S50-200DF
500	5	100S50-210AF	100S50-210BF	100S50-210CF	100S50-210DF
	7,5	100S50-210AG	100S50-210BG		
	10	100S50-210AH	100S50-210BH		
600	5	100S50-220AF	100S50-220BF	100S50-220CF	100S50-220DF
	7,5	100S50-220AG	100S50-220BG		
	10	100S50-220AH	100S50-220BH		
750	5	100S50-230AF	100S50-230BF	100S50-230CF	100S50-230DF
	7,5	100S50-230AG	100S50-230BG		
	10	100S50-230AH	100S50-230BH		
1000	5	100S50-250AF	100S50-250BF	100S50-250CF	100S50-250DF
	7,5	100S50-250AG	100S50-250BG		
	10	100S50-250AH	100S50-250BH		
1200	5	100S50-260AF	100S50-260BF	100S50-260CF	100S50-260DF
	7,5	100S50-260AG	100S50-260BG		
	10	100S50-260AH	100S50-260BH		
1250	5	100S50-270AF	100S50-270BF	100S50-270CF	100S50-270DF
	7,5	100S50-270AG	100S50-270BG		
	10	100S50-270AH	100S50-270BH		
1500	5	100S50-280AF	100S50-280BF	100S50-280CF	100S50-280DF
	7,5	100S50-280AG	100S50-280BG		
	10	100S50-280AH	100S50-280BH		
	15		100S50-280BJ		


		Art.-no.
	Snap-on mounting	-
	Sealed shutter	-

SASK 61.10

Protection plug-in current transformer



Bus bar 1 60 x 10 mm
 Bus bar 2 50 x 30 mm
 Transformer width 150 mm
 Height 175,5 mm
 Depth 114 mm

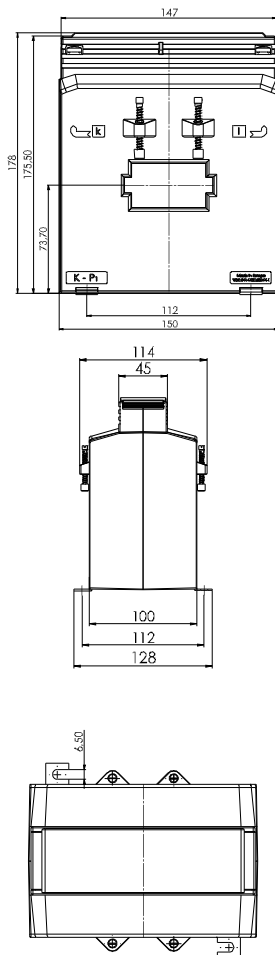




Primary current [A]	Burden [VA]	Secondary current [A] / Class			
		1 A Cl. 5P5 Art.-no.	1 A Cl. 10P5 Art.-no.	1 A Cl. 5P10 Art.-no.	1 A Cl. 10P10 Art.-no.
100	2,5	100S50-1316D	100S50-1317D	100S50-1318D	100S50-1319D
	5	100S50-1316F	100S50-1317F		
150	5	100S50-1616F	100S50-1617F	100S50-1618F	100S50-1619F
	7,5	100S50-1616G	100S50-1617G		
200	10	100S50-1616H	100S50-1617H		
	5	100S50-1716F	100S50-1717F	100S50-1718F	100S50-1719F
	7,5	100S50-1716G	100S50-1717G		
	10	100S50-1716H	100S50-1717H		
250	15	100S50-1716J	100S50-1717J		
	5	100S50-1816F	100S50-1817F	100S50-1818F	100S50-1819F
	7,5	100S50-1816G	100S50-1817G		100S50-1819G
	10	100S50-1816H	100S50-1817H	100S50-1918H	100S50-1819H
300	15	100S50-1816J	100S50-1817J		
	5	100S50-1916F	100S50-1917F	100S50-1918F	100S50-1919F
	7,5	100S50-1916G	100S50-1917G	100S50-1918G	100S50-1919G
	10	100S50-1916H	100S50-1917H		100S50-1919H
400	15	100S50-1916J	100S50-1917J		
	5	100S50-2016F	100S50-2017F	100S50-2018F	100S50-2019F
	7,5	100S50-2016G	100S50-2017G	100S50-2018G	100S50-2019G
	10	100S50-2016H	100S50-2017H	100S50-2018H	100S50-2019H
500	15	100S50-2016J	100S50-2017J		100S50-2019J
	5	100S50-2116F	100S50-2117F	100S50-2118F	100S50-2119F
	7,5	100S50-2116G	100S50-2117G	100S50-2118G	100S50-2119G
	10	100S50-2116H	100S50-2117H	100S50-2118H	100S50-2119H
600	15	100S50-2116J	100S50-2117J	100S50-2118J	100S50-2119J
	5	100S50-2216F	100S50-2217F	100S50-2218F	100S50-2219F
	7,5	100S50-2216G	100S50-2217G	100S50-2218G	100S50-2219G
	10	100S50-2216H	100S50-2217H	100S50-2218H	100S50-2219H
750	15	100S50-2216J	100S50-2217J	100S50-2218J	100S50-2219J
	5	100S50-2316F	100S50-2317F	100S50-2318F	100S50-2319F
	7,5	100S50-2316G	100S50-2317G	100S50-2318G	100S50-2319G
	10	100S50-2316H	100S50-2317H	100S50-2318H	100S50-2319H
1000	15	100S50-2316J	100S50-2317J	100S50-2318J	100S50-2319J
	5	100S50-2516F	100S50-2517F	100S50-2518F	100S50-2519F
	7,5	100S50-2516G	100S50-2517G	100S50-2518G	100S50-2519G
	10	100S50-2516H	100S50-2517H	100S50-2518H	100S50-2519H
1200	15	100S50-2516J	100S50-2517J	100S50-2518J	100S50-2519J
	5	100S50-2616F	100S50-2617F	100S50-2618F	100S50-2619F
	7,5	100S50-2616G	100S50-2617G	100S50-2618G	100S50-2619G
	10	100S50-2616H	100S50-2617H	100S50-2618H	100S50-2619H
1250	15	100S50-2616J	100S50-2617J	100S50-2618J	100S50-2619J
	5	100S50-2716F	100S50-2717F	100S50-2718F	100S50-2719F
	7,5	100S50-2716G	100S50-2717G	100S50-2718G	100S50-2719G
	10	100S50-2716H	100S50-2717H	100S50-2718H	100S50-2719H
1500	15	100S50-2716J	100S50-2717J	100S50-2718J	100S50-2719J
	5	100S50-2816F	100S50-2817F	100S50-2818F	100S50-2819F
	7,5	100S50-2816G	100S50-2817G	100S50-2818G	100S50-2819G
	10	100S50-2816H	100S50-2817H	100S50-2818H	100S50-2819H
1500	15	100S50-2816J	100S50-2817J	100S50-2818J	100S50-2819J

SASK 61.10

Protection plug-in current transformer



Bus bar 1 60 x 10 mm
 Bus bar 2 50 x 30 mm
 Transformer width 150 mm
 Height 175,5 mm
 Depth 114 mm



Primary current [A]	Burden [VA]	Secondary current [A] / Class			
		1 A Cl. 5P15 Art.-no.	1 A Cl. 10P15 Art.-no.	1 A Cl. 5P20 Art.-no.	1 A Cl. 10P20 Art.-no.
150	2,5	100S50-161AD	100S50-161BD		
200	2,5	100S50-171AD	100S50-171BD	100S50-171CD	100S50-171DD
250	2,5	100S50-181AD	100S50-181BD	100S50-181CD	100S50-181DD
	5	100S50-181AF	100S50-181BF		
300	2,5	100S50-191AD	100S50-191BD	100S50-191CD	100S50-191DD
	5	100S50-191AF	100S50-191BF		100S50-191DF
400	5	100S50-201AF	100S50-201BF	100S50-201CF	100S50-201DF
500	5	100S50-211AF	100S50-211BF	100S50-211CF	100S50-211DF
	7,5	100S50-211AG	100S50-211BG		
	10	100S50-211AH	100S50-211BH		
600	5	100S50-221AF	100S50-221BF	100S50-221CF	100S50-221DF
	7,5	100S50-221AG	100S50-221BG		
	10	100S50-221AH	100S50-221BH		
750	5	100S50-231AF	100S50-231BF	100S50-231CF	100S50-231DF
	7,5	100S50-231AG	100S50-231BG		
	10	100S50-231AH	100S50-231BH		
1000	5	100S50-251AF	100S50-251BF	100S50-251CF	100S50-251DF
	7,5	100S50-251AG	100S50-251BG		
	10	100S50-251AH	100S50-251BH		
1200	5	100S50-261AF	100S50-261BF	100S50-261CF	100S50-261DF
	7,5	100S50-261AG	100S50-261BG		
	10	100S50-261AH	100S50-261BH		
1250	5	100S50-271AF	100S50-271BF	100S50-271CF	100S50-271DF
	7,5	100S50-271AG	100S50-271BG		
	10	100S50-271AH	100S50-271BH		
1500	5	100S50-281AF	100S50-281BF	100S50-281CF	100S50-281DF
	7,5	100S50-281AG	100S50-281BG		
	10	100S50-281AH	100S50-281BH		
	15		100S50-281BJ		

		Art.-no.
	Snap-on mounting	-
	Sealed shutter	-